




COVER RUBBER

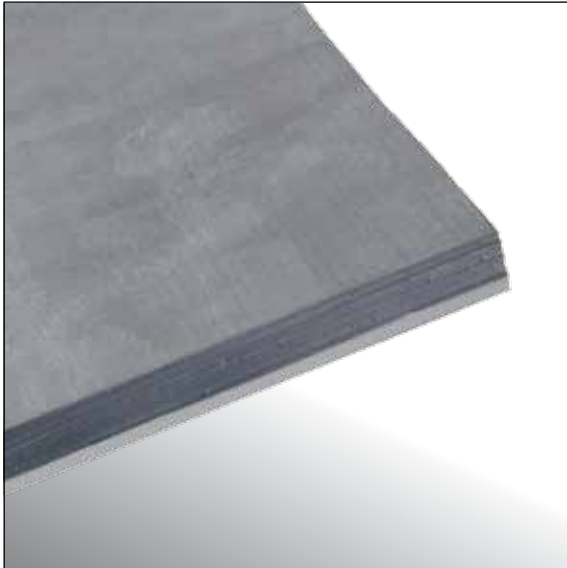

Fusion Cover Rubber is recommended for the repair of conveyor belt covers or as cover for cold bond splice applications. Recommended for the repair of conveyor belts or for the repairs of tank linings under certain conditions.

FEATURES:

- Excellent abrasion resistance and UV inhibitors to provide durable repairs to conveyor belts or for cold bond splices
- High abrasion index
- Supplied with the Fusion Systems Bonding layer on one side for superior adhesion to the conveyor belt
- Offered in several gauges and widths

PRODUCT CODE	Thickness/Gauge		Width		Length			Weight	
	frac	in	mm	in	mm	ft	m	lbs	kg
Cover Rubber									
CR-CRB-0616	1/16	0.06	1.05	20	500	16.5	5.0	16	17
CR-CRB-1216	1/8	0.12	3	20	500	16.5	5.0	33	14



Note: The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.

Updated: Dec. 2011