




## FABRIC BELT TIE GUM

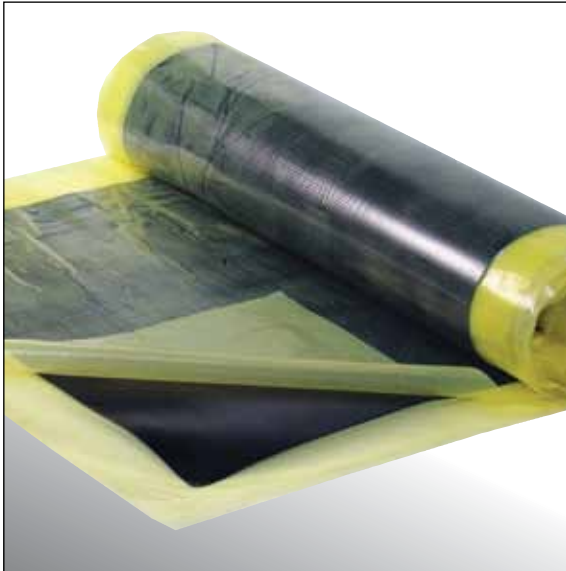

Fabric Belt Tie Gum is an uncured rubber for hot vulcanized belt splicing. It is designed for use as a skim rubber replacement material in splicing fabric conveyor belts. The material is designed to bond all standard grades of fabric conveyor belts.

### FEATURES:

- Enhances working life of fabric belt splices
- Improves flexibility and strength of conveyor belt splices
- Eliminates surface contamination (normal application) with double sided poly
- Uses poly color coding system to ID compound
- For Natural Rubber (NR), Polyisoprene (IR), Styrene-Butadiene (SBR), Polybutadiene (BR), Polychloroprene i.e. - Neoprene (CR) rubber belt splices

PROPERTIES	
Rubber Color	Black
Poly Liner Color	Yellow (double sided)
Base Polymer	NR Rubber
Specific Gravity	1.15 - 1.21
Hardness	65 - 75 Shore A
Rubber Tensile	2500 - 3000 psi
Rubber Elongation	300 - 500% (at break)
Shelf Life	6 months at 70°F or 12 months at 50°F

PRODUCT CODE	Poly Color (both sides)	Thickness/Gauge			Width		Length		Roll Weight	
		fac	in	mm	in	m	ft	m	kg	lb
AA-FBG-020	Yellow	-	.020	.5	20	.5	49	15	4.4	9.7
AA-FBG-030	Yellow	-	.028	.7	20	.5	49	15	6.1	13.5
AA-FBG-040	Yellow	-	.039	1	20	.5	49	15	8.8	19.3
AA-FBG-060	Yellow	-	.059	1.5	20	.5	49	15	13.2	29
AA-FBG-080	Yellow	-	.079	2	20	.5	49	10	11.7	25.7



**Note:** The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.

Updated: Dec. 2011