




FUSION COMBI SCRAPER 65/45/65

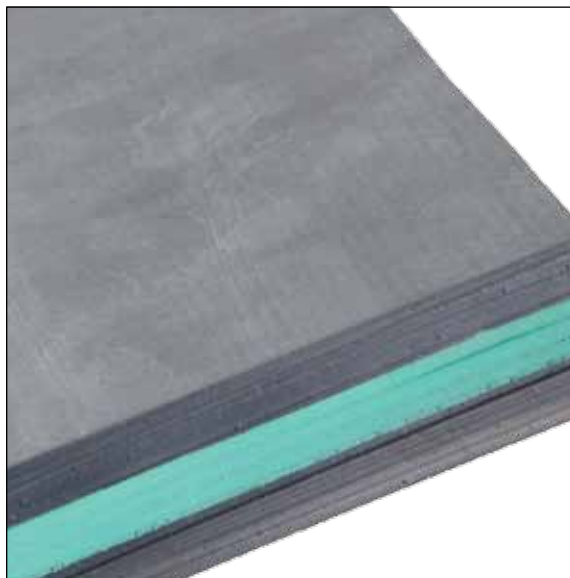

Fusion Combi 65/45/65 is a vulcanized laminate of 2 hard outer layers containing a softer green inside layer. Perfect for finer slurry type applications.

FEATURES:

- Twice the wear life of commercial SBR rubber
- Produced with the finest natural rubber
- Multi-layer construction provides long wear life with excellent cleaning capabilities
- Hard outside layers provide wear and rigid stability
- Soft inside layer provides superior squeegee type cleaning

PROPERTIES

Colour	Black	Green
Elastomer	Natural Rubber	Natural Rubber
Tensile Strength	21.0 Mpa	22.5 Mpa
Elongation at Break	550%	700
Density	1.10 g / cm ³	1.10 g / cm ³
Hardness	65 Shore A	45 Shore A
Abrasion Resistance	60 cm ³	225 cm ³

PRODUCT CODE	Thickness/Gauge		Width		Roll Length		Roll Weight	
	in	mm	in	mm	ft	m	lbs	kg
CCR-6545-7506	3/4	20	6.0	150	50	15.25	75	34
CCR-6545-7508	3/4	20	8.0	200	50	15.25	95	43
CCR-6545-755950	3/4	20	59.0	1500	50	15.25	730	331
CCR-6545-1006	1	25	6.0	150	50	15.25	92	42
CCR-6545-1008	1	25	8.0	200	50	15.25	118	54
CCR-6545-105950	1	25	59.0	1500	50	15.25	905	410
CCR-6545-1506	1 1/2	40	6.0	150	16 1/2	5	75	34
CCR-6545-1508	1 1/2	40	8.0	200	16 1/2	5	98	45



Note: The above data is based on extensive testing and represents standard values. Shaw Almix Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.

Updated: Dec. 2011