




# FUSIONWEAR 45

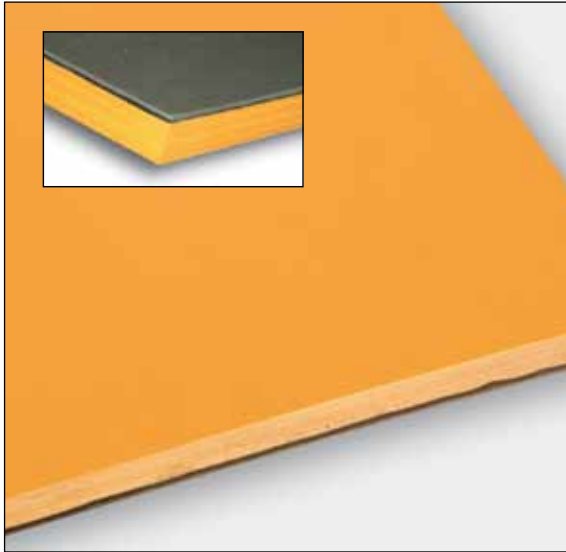

FusionWear 45 is a premium quality natural rubber compound, ideal for both wet and dry abrasive applications.

### FEATURES:

- Outstanding resilience and resistance to wet abrasion and cutting wear
- Is manufactured with a proprietary bonding layer technology, available on one or both sides
- For use with the full range of Fusion Systems cold bonding adhesives
- Proven results in handling applications such as slurries, pipelines, launders, sumps, pumps, hydrocyclones, flotation cells, tank and chute linings as well as bend and snub pulley linings
- Available in 10 M length rolls upon request

PROPERTIES			
Colour	Orange		
Elastomer	NR		
Tensile Strength	20 Mpa		DIN 53504
Elongation at Break	600%		DIN 53504
Density	1.02 g / cm <sup>2</sup>		DIN 53505
Hardness	45 (-5) Shore A		DIN 53505
Abrasion Resistance	65 mm <sup>3</sup> @ 5 N		DIN 53516
Resilience	65%		DIN 53512

PRODUCT CODE	Thickness/Gauge		Width		Length		Roll Weight	
	in	mm	in	mm	ft	m	lbs	kg
CFWO-40SB-1250	1/8	3	59	1500	50	15.25	175	81
CFWO-40SB-2550	1/4	6	59	1500	50	15.25	358	163
CFWO-40SB-3750	3/8	10	59	1500	50	15.25	537	244
CFWO-40SB-5050	1/2	12	59	1500	50	15.25	716	325
CFWO-40SB-7550	3/4	20	59	1500	50	15.25	1190	541
CFWO-40SB-1050	1	25	59	1500	50	15.25	1450	659
CFWO-40SB-2050	2	50	59	1500	16.5	5.0	480	220



**Note:** The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.

Updated: Dec. 2011