




FUSIONWEAR 35

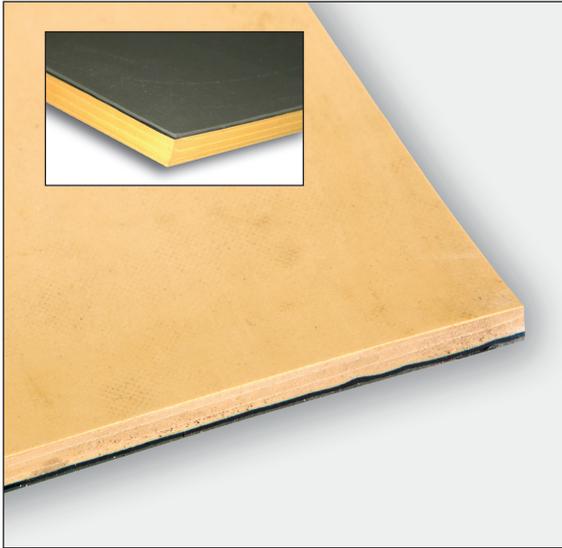

FusionWear 35 is a premium grade precured natural rubber compound, ideal for slurry handling and other wet material handling applications.

FEATURES:

- Specially formulated for superior wear and abrasion resistance properties
- Excellent elasticity and resilience, providing years of economical service in high wear areas
- Is manufactured with a proprietary bonding layer technology, available on one or both sides
- For use with the full range of Fusion Systems cold bonding adhesives
- Proven results in materials handling applications such as pipelines, launders, sumps, pumps, hydrocyclones, flotation cells, tank and chute linings
- Available in 10 M length rolls upon request

PROPERTIES			
Colour	Tan		
Elastomer	NR		
Tensile Strength	19 Mpa		DIN 53504
Elongation at Break	650%		DIN 53504
Density	1.00 g / cm ³		DIN 53505
Hardness	38 (-3) Shore A		DIN 53505
Abrasion Resistance	85 mm ³ @ 5 N		DIN 53516
Resilience	70%		DIN 53512

PRODUCT CODE	Thickness/Gauge		Width		Length		Roll Weight	
	in	mm	in	m	ft	m	lbs	kg
CFW-35SB-1250	1/8	3	59	1500	50	15.25	175	80
CFW-35SB-2550	1/4	6	59	1500	50	15.25	525	39
CFW-35SB-5050	1/2	12	59	1500	50	15.25	700	318
CFW-35SB-7550	3/4	20	59	1500	50	15.25	1160	530
CFW-35SB-1050	1	25	59	1500	50	15.25	1450	659



Note: The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.

Updated: Dec. 2011