




## STEEL CORD BELT COVER STOCK

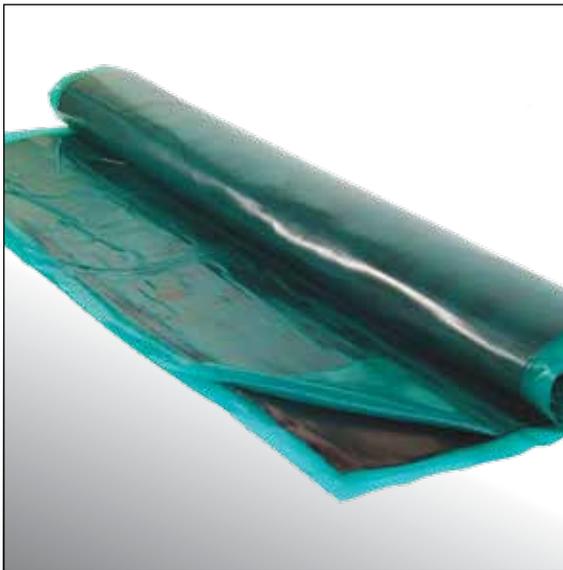

Steel Cord Belt Cover Stock is an uncured rubber for hot vulcanized belt splicing. It is designed for use as a cover rubber replacement material in splicing steel cord and fabric conveyor belts. The material is designed to bond to cured cover rubber in all standard grades of steel cord and fabric conveyor belts.

### FEATURES:

- Enhances working life of steel cord belts splices
- Improves wear and tearing resistance on conveyor belt splices
- Eliminates surface contamination (normal application) with double sided poly
- Uses poly color coding system to ID compound
- For Natural Rubber (NR), Polyisoprene (IR), Styrene-Butadiene (SBR), Polybutadiene (BR), Polychloroprene i.e. - Neoprene (CR) rubber belt splices

### PROPERTIES

Rubber Color	Black
Poly Liner Color	Green (double sided)
Base Polymer	SBR Rubber
Specific Gravity	1.13 - 1.19
Hardness	62 - 70 Shore A
Rubber Tensile	2700 - 3200 psi
Rubber Elongation	400 - 600% (at break)
Shelf Life	6 months at 70°F or 12 months at 50°F

PRODUCT CODE	Poly Color (both sides)	Thickness/Gauge			Width		Length		Roll Weight	
		fac	in	mm	in	m	ft	m	kg	lb
AA-STC-062	Green	1/16	.063	1.6	39	1	49	15	27.6	60.7
AA-STC-093	Green	3/32	.090	2.3	39	1	33	10	26.5	58.2
AA-STC-125	Green	1/8	.126	3.2	39	1	26	8	29.4	64.8
AA-STC-156	Green	5/32	.153	3.9	39	1	26	8	35.9	78.9
AA-STC-187	Green	3/16	.185	4.7	39	1	16	5	27	59.5
AA-STC-218	Green	7/32	.216	5.5	39	1	16	5	31.6	69.6
AA-STC-250	Green	1/4	.248	6.3	39	1	16	5	36.2	79.7
AA-STC-312	Green	5/16	.307	7.8	39	1	13	4	35.9	78.9
AA-STC-375	Green	3/8	.365	9.3	39	1	13	4	42.8	94.1



**Note:** The above data is based on extensive testing and represents standard values. Shaw Almex Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.

Updated: Dec. 2011